CL3000 SERIES

Feature title

PLU Keys

The embossing membrane type keypad adds a steady look of CL3000-P and CL3000-B.

Double-click function provides easy access to the key's secondary PLU, totaling in double of PLU key number. (P type: 72 PLU key, B type: 40 or 60 PLU key)



Display

Numeric and graphic combined LCD display suitable for any environment. Numeric LCD(4/5/6/6) + Full Graphic LCD(16x198)



Printer

High speed thermal printer that supports label/ticket printing. Guaranteed satisfaction with 90mm/s to 110mm/s speed and 202dpi resolution.



Paper Cartridge

Cartridge loading type supports quick and easy replacement of new label roll.



Interface

It supports 2PCS of RS232C, RJ11 for cash drawer and RJ45 for Ethevnet connection.

PRODUCT LINE UP

- CL3000 is compatible with CL5000 series in the same network
- Combined wide LCD looks better than CL5000's





CL5000 LINE UP









TOTAL WEIGHING SOLUTION™

Network Scale

Software

Label Formats

There are 40 preset labels installed in the scale and additional 20 formats can be


modified freely with



Barcode

Almost every conventional 1-Dimensional barcode types are available:

UPC, EAN13, EAN13A5, I2OF5, CODE128, CODE39, CODE93, CODABAR, IATA2OF5



PC Software: CL-Works

It supports PLU programming, store data, sales report, label editor and much more. You can control all the program data by CL-Works. CL5000 and CL5500 share this software with CL3000.

Menu System

No need to scroll through menus for programming settings. Unique 4 digit 'Menu Code' entry pin helps pinpoint the desired program field.

ex) Menu code '1120' is for editing PLU name.





PLU Editor | Enable to easy PLU control Allows PLUs management by excel



Label Editor 20 modifiable label formats Easy downloading of label formats



Keypad Editor | Easy to setup and download | Key design colour Image | Keypad supported


Network System

- TCP/IP communication protocol
- IEEE802.11G specification wireless network

• 64/128 bit WEP data security system, WPA(TKIP), WPA-II

One to one & multi to multi & wired/wireless network
 Network structure for

 Large, medium and small independent markets
 Pre-pack and self-service counter
 Hyper market

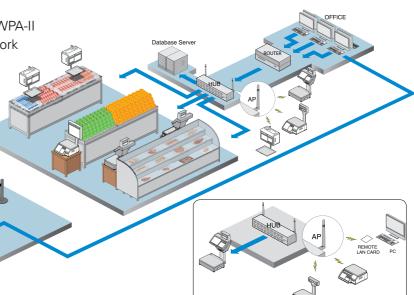

▲ Mixed with Wired / Wireless Network

Multi to Multi



CL3000 SERIES | Network Scale

SPECIFICATIONS

Model	CL3000		
Max.capacity (kg)	6	6 / 15	15 / 30
Readability (g)	2	2/5	5 / 10
External resolution	1/3,000 (dual interval)		
Display Type	24 Numeric + Graphic		
Printing speed	100mm / sec		
Printer resolution	202dpi		
Label size (mm)	Width: 40~60, 30~100		
Power	AC 180~240V 50 / 60Hz		
Platter size (mm)	380 X 240		
Product weight (kg)	6.95(Cl3000-B), 7.65(Cl3000-P)		
1/0	RS232c, RJ11, TCP / IP		


FEATURES

- Memory capacity: 3,000PLU
- Speed key: B-type (40direct plu or 60 direct plu) P-Type (72direct plu)
- High-speed thermal printer (100mm / sec)
- Paper replacing method : cartridge
- 40 fixed format & 20 customized format design

OPTION

Wireless bridge card

DIMENSIONS

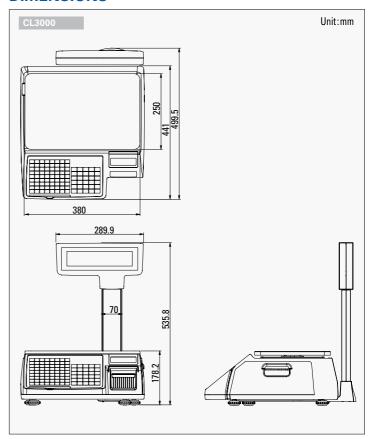



CAS BLDG., # 440-1, SUNGNAE-DONG, GANGDONG-GU, SEOUL, KOREA


TEL_82 2 2225 3500 FAX_ 82 2 475 4668

http://www.globalcas.com









Direct PLU keys & function keys

CL3000 SERIES

It's the best network solution for your business!

- Flexible & reliable network system (wired / wireless)
- Easy loading paper cartridge
- Free format label design
- User friendly PC software



